





Double Pitch Chain

- * Dong Bo Double Pitch Chain conform to ANSI and manufactured in <Environment Resistant Chain Series > as are single pitch chain.
- * Heavy side plates are used for 2060H, 2062H and up

Type-A

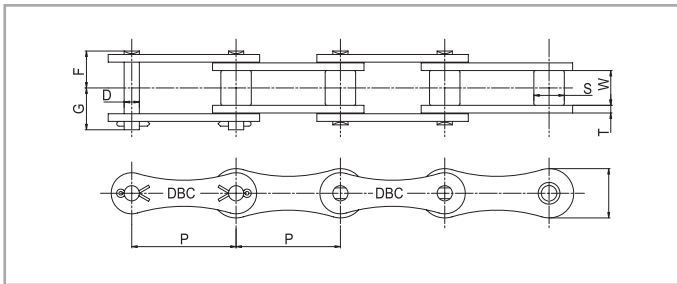


Type-C

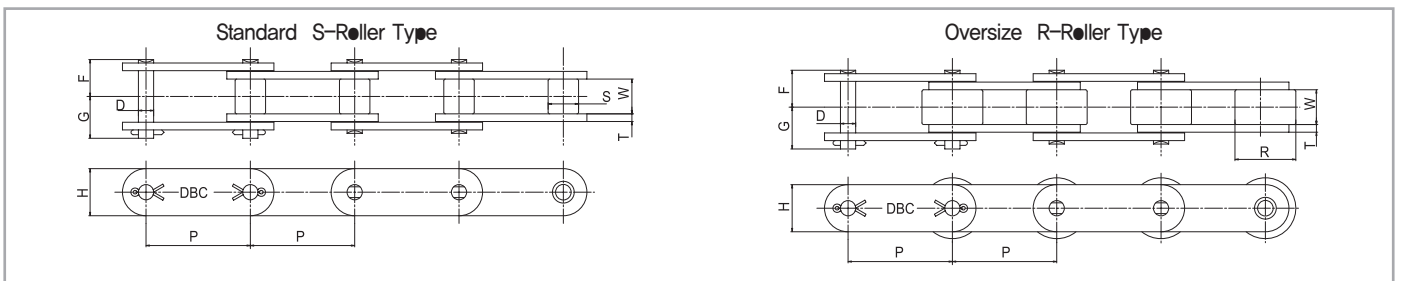

Double Pitch Chain : Example of type indication

DBC A 2082 H A-2 2L

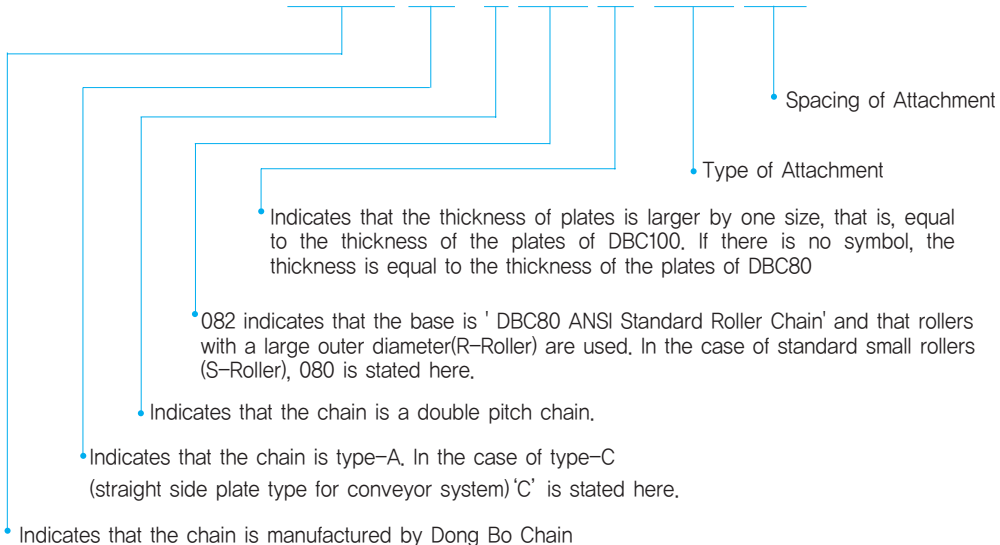



Double Pitch Chain

DONG BO Chain No.	Pitch	Inner Width	Roller Dia S-Roller	Roller Dia R-Roller	Pin			Plate		Avg Breaking Load	max Allowable Load	Approx. Weight
	P	W min	S max	R	F	G	D max	T	H max	kgf	kgf	kg/m

Type-A

unit : mm

DBC A2040	25.40	7.95	7.94	-	8.25	9.95	3.97	1.5	12.0	1,700	270	0.40
DBC A2050	31.75	9.53	10.16	-	10.30	12.00	5.09	2.0	15.0	2,800	450	0.66
DBC A2060	38.10	12.70	11.91	-	12.85	14.75	5.96	2.4	18.0	4,100	660	0.96
DBC A2080	50.80	15.88	15.88	-	16.25	19.25	7.94	3.2	24.1	7,000	1,150	1.73
DBC A2100	63.50	19.05	19.05	-	19.75	22.85	9.54	4.0	30.1	11,000	1,900	2.57
DBC A2120	76.20	25.40	22.23	-	24.90	28.90	11.11	4.8	36.2	15,400	2,600	3.68


Type-C

DBC C2040	25.40	7.95	7.94	-	8.25	9.95	3.97	1.5	12.0	1,700	270	0.51
DBC C2042			-	15.88								0.87
DBC C2050	31.75	9.53	10.16	-	10.30	12.00	5.09	2.0	15.0	2,800	450	0.84
DBC C2052			-	19.05								1.30
DBC C2060 H	38.10	12.70	11.91	-	14.55	16.55	5.96	3.2	18.1	4,100	660	1.51
DBC C2062 H			-	22.23								2.19
DBC C2080 H	50.80	15.88	15.88	-	18.30	20.90	7.94	4.0	24.1	7,000	1,150	2.66
DBC C2082 H			-	28.58								3.68
DBC C2100 H	63.50	19.05	19.05	-	21.80	24.50	9.54	4.8	30.1	11,000	1,900	3.99
DBC C2102 H			-	39.67								6.30
DBC C2120 H	76.20	25.40	22.23	-	26.95	30.55	11.11	5.6	36.2	15,400	2,600	5.35
DBC C2122 H			-	44.45								8.60
DBC C2160 H	101.60	31.75	28.58	-	33.65	38.45	14.29	7.2	48.2	26,300	4,300	9.42
DBC C2162 H			-	57.15								11.79


* C2040~: standard S-Roller Type * C2040~: standard S-Roller Type




Double Pitch Attachment Chain

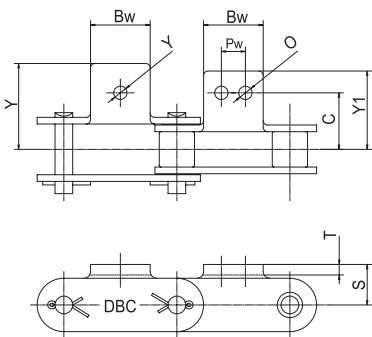


A-1, A-2 Att.*

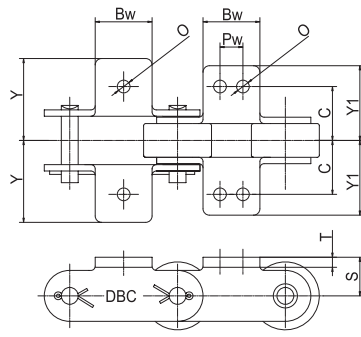


K-1, K-2 Att.

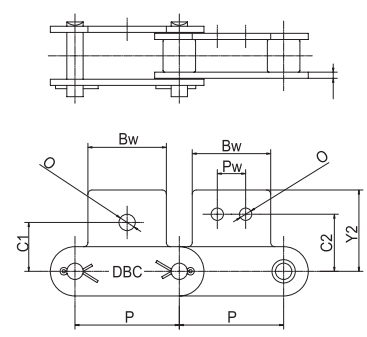


SA-1, SA-2 Att.

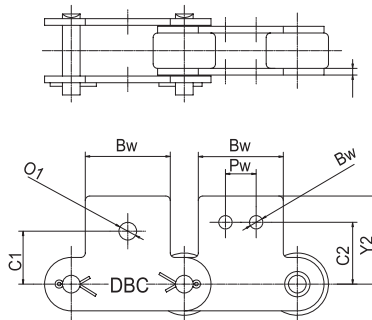


SK-1, SK-2 Att.

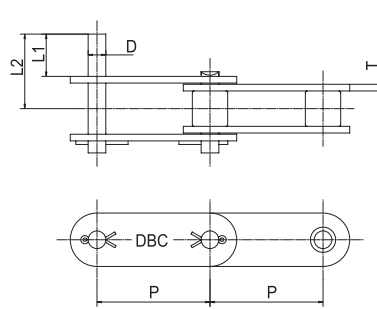


D-1 Att.

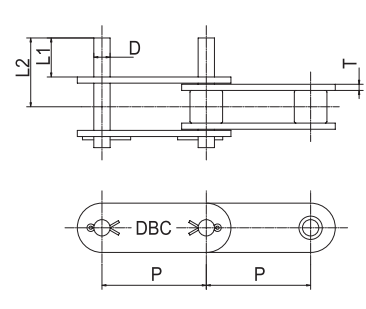

D-3 Att.



G-Att. (S-Roller Type)



G-Att. (R-Roller Type)

* Att.=Attachment



Double Pitch Attachment Chain

DONG BO Basic Chain No.	Attachment Dimensions									
	P	T	C	C1	C2	Bw	Pw	O	O1	S
	unit : mm									
DBC C2040	25.40	1.5	12.70	11.10	13.60	19.10	9.50	3.60	5.20	9.10
DBC C2042										
DBC C2050	31.75	2.0	15.90	14.30	15.90	23.80	11.90	5.20	6.80	11.10
DBC C2052										
DBC C2060H	38.10	3.2	21.45	17.50	19.10	28.60	14.30	5.20	8.70	14.70
DBC C2062H										
DBC C2080H	50.80	4.0	27.80	22.20	25.40	38.10	19.10	6.80	10.30	19.10
DBC C2082H										
DBC C2100H	63.50	4.8	33.35	28.60	31.80	47.60	23.80	8.70	14.30	23.40
DBC C2102H										
DBC C2120H	76.20	5.6	39.70	33.30	37.30	57.20	28.60	14.00	16.00	27.80
DBC C2122H										
DBC C2160H	101.60	7.2	52.39	44.45	50.80	76.20	38.10	16.10	19.50	36.50
DBC C2162H										

DONG BO Basic Chain No.	Attachment Dimensions							Additional Weight per Attachment(kg)			
	Y	Y1	Y2	D	L1	L2	N	A&SA	K&SK	D-1	D-3
	unit : mm										
DBC C2040	19.30	17.60	19.80	3.97	9.5	16.85	4.07	0.003	0.006	0.001	0.002
DBC C2042											
DBC C2050	24.20	22.00	24.60	5.09	11.9	21.15	5.20	0.006	0.012	0.002	0.004
DBC C2052											
DBC C2060H	31.50	28.20	30.60	5.96	14.3	27.50	6.07	0.017	0.034	0.003	0.006
DBC C2062H											
DBC C2080H	40.70	36.60	40.50	7.94	19.1	35.58	8.10	0.037	0.074	0.007	0.014
DBC C2082H											
DBC C2100H	49.90	44.90	50.40	9.54	23.8	43.58	9.67	0.067	0.134	0.012	0.024
DBC C2102H											
DBC C2120H	60.70	54.40	59.90	-	-	-	11.24	0.100	0.200	-	-
DBC C2122H											
DBC C2160H	79.00	71.00	78.60	-	-	-	14.47	0.240	0.490	-	-
DBC C2162H											